

Quick operation guide

N58plus radio

Catalogue

Product indication chart	01
Function use introduction	02
1. Function overview	02
2. Edit the group	05
3. My group list	06
4. Link mode	07
5. Set up	09


Product indication chart



Function usage introduction

1. Function overview

Enter the same group number (the current range is 100000000 to 99999999) to achieve one-key intercom, support single and double waiting, save the frequency value to the My group list, and share the geographical location of the machine to other users in real time.

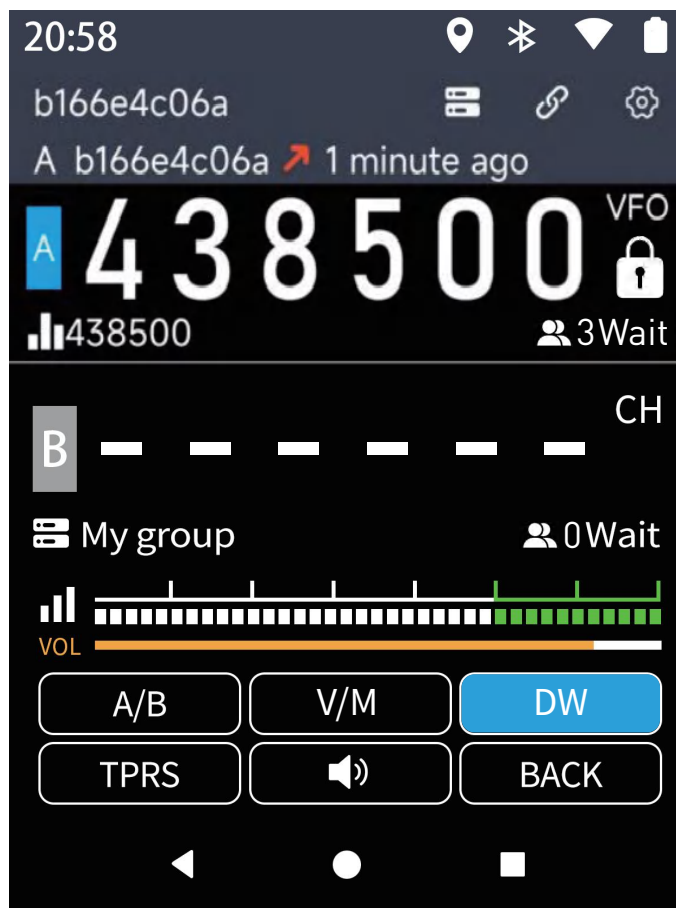















b166e4c06a The current login user name or account.

A b166e4c06a 1 minute ago Indicates that the user started the mic on stage A 1 minutes ago.



A 7804007605 1 minute ago Signal received from user 7804007605 on stage A 1 minute ago.

A B The main waiting sign, there are two stages A,B, the main waiting stage background color is lit up

	My Groups list entry, or "My Groups" mode.
	Link list entry, or link mode.
	Set the entry, change the Settings to enter from here.
	If it is displayed after the group number, the last two digits of the group number are not 00, which is generally regarded as the password of the group. When the last two digits are 00, the lock icon is not displayed by default.
	Group mode.
	The number of people currently online in the group.
	Indicates group mode.
	Indicates my group mode.
	Switch stages A and B.
	Group, my group, links the three mode switch in turn.
	Double waiting, can receive signals A, B two stage.
	Single waiting for you, can only receive signals main stage.
	Set the multimedia volume to silent or half volume with one click.
	Step back to the background and return to the system desktop.

TPRS

View geolocation information shared by other users.

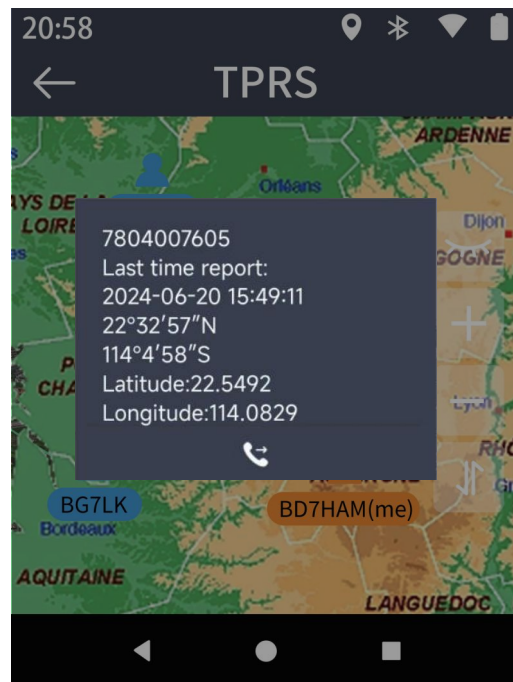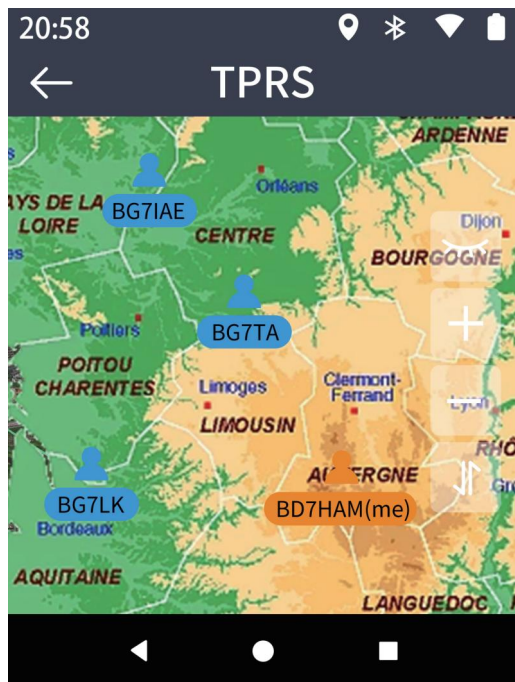

View all user locations on the current map.



Hide part of the menu, click again to display the menu.



If the local reports the location, the local location is in the center.



Zoom in on the map.



Zoom out the map.




Toggle map display type.



Initiate a half-duplex single call.

2. Edit the group


In different modes, you can tap a group number to enter different editing or adding screens. Take group mode as an example, want to wait for which group number, directly click the number, cannot start with 0, the last two digits as the password; If the group number is in the range of 10000000 to 99999999, click OK to wait for the newly entered group number. Otherwise, a failure message is displayed. The link mode is similar to the group mode, except that the number range is 800001 to 899999.

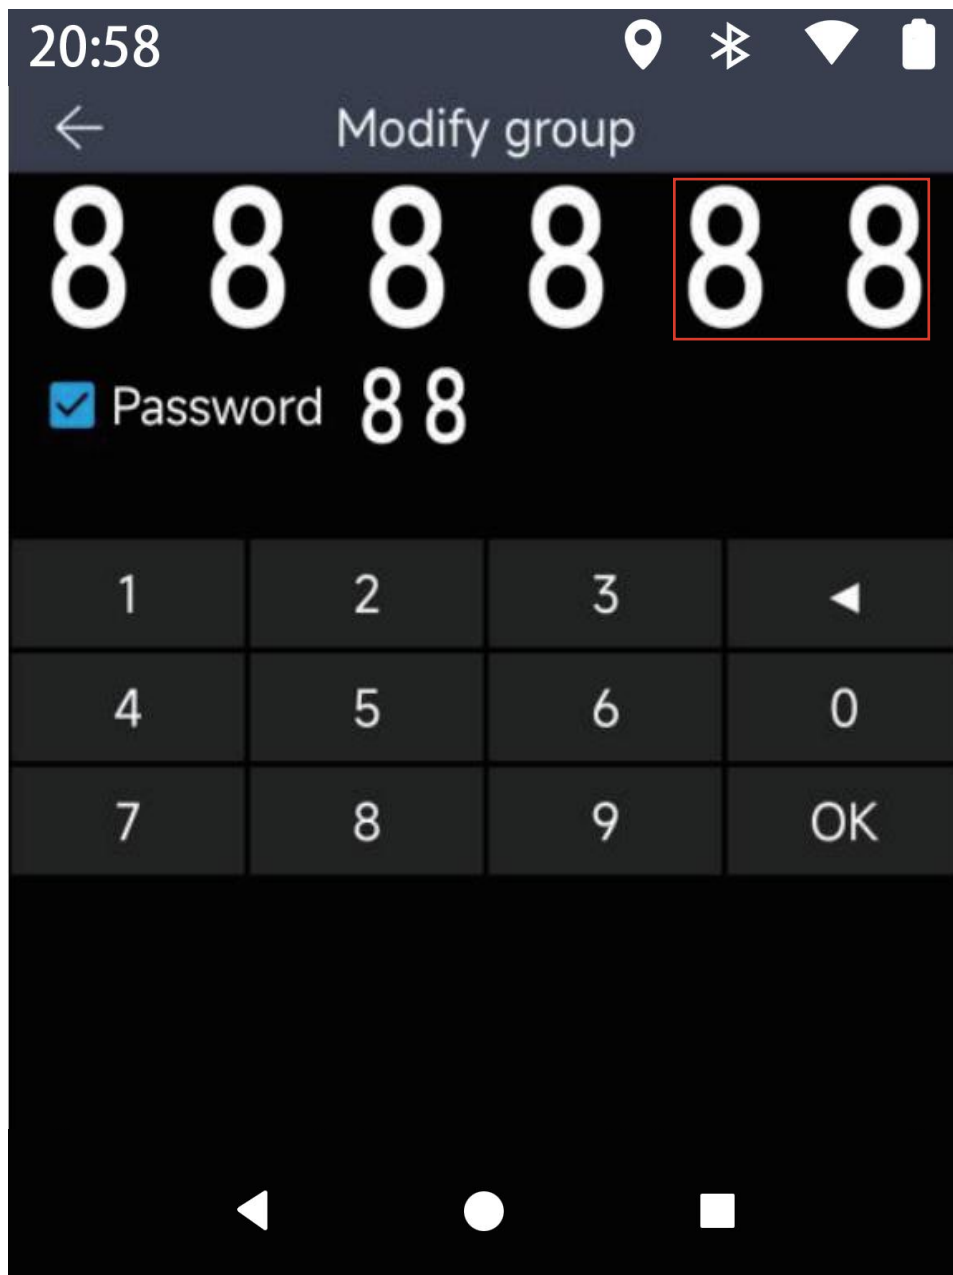

3. My group list


Click to **+** create a group in the Create New Group screen;


Click to **-** the icon to delete the group, if the group is waiting, then quit waiting at the same time; Press and hold a group to open the group editing screen. Click on the group, if the group number is within a reasonable range, and is not waiting, the main stage is waiting for the group; The group name is visible only on the local computer and cannot be seen by other users.

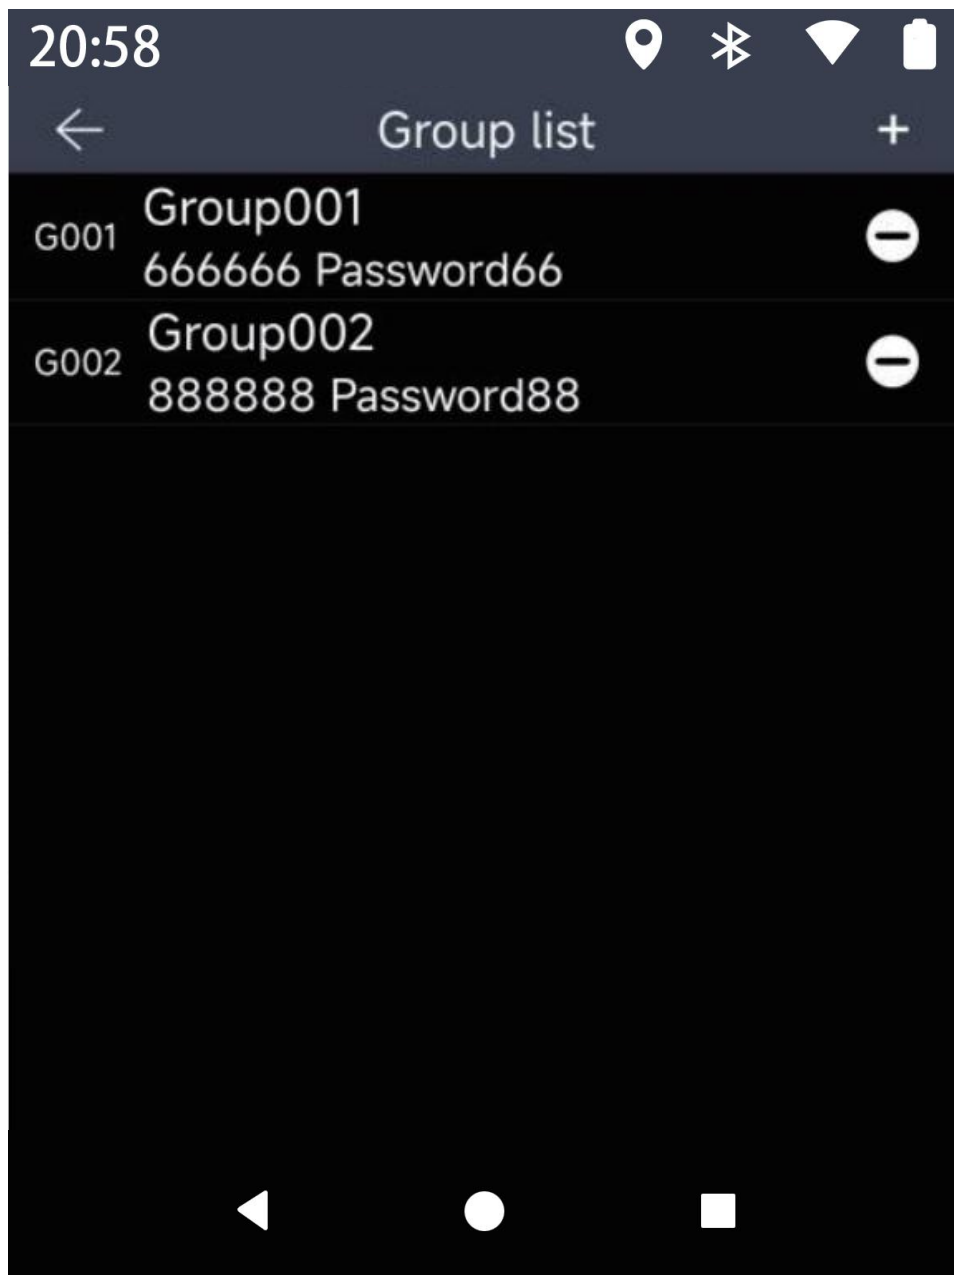


4. Link mode


Click the link entry icon, and click the icon in the upper right corner to **+** open the interface for adding links. Enter the link ID and click OK. If the ID is correct, the link is added successfully.

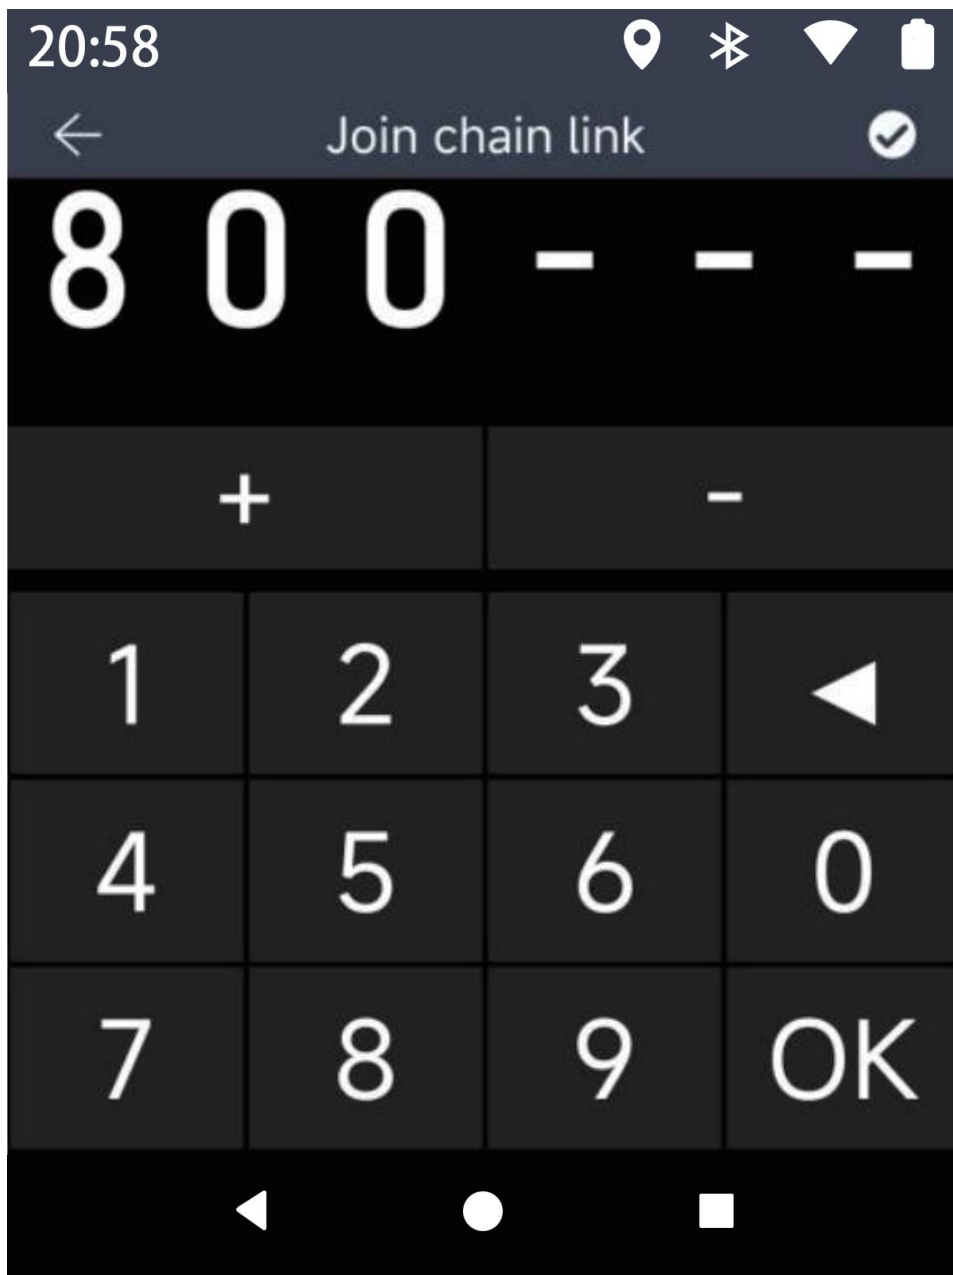

Click a link. If no group number is waiting for the link, wait for the ID of the link. Otherwise, exit the group number and wait for the ID of the link. Press and hold the link to open the link editing screen. If the modified link is available and the ID of the modified link is different, exit the available link first. Then determine whether the modified link is available based on the status. Click to  the icon on the right to delete the link. If the deleted link is waiting, the link will be unwaiting and then deleted.

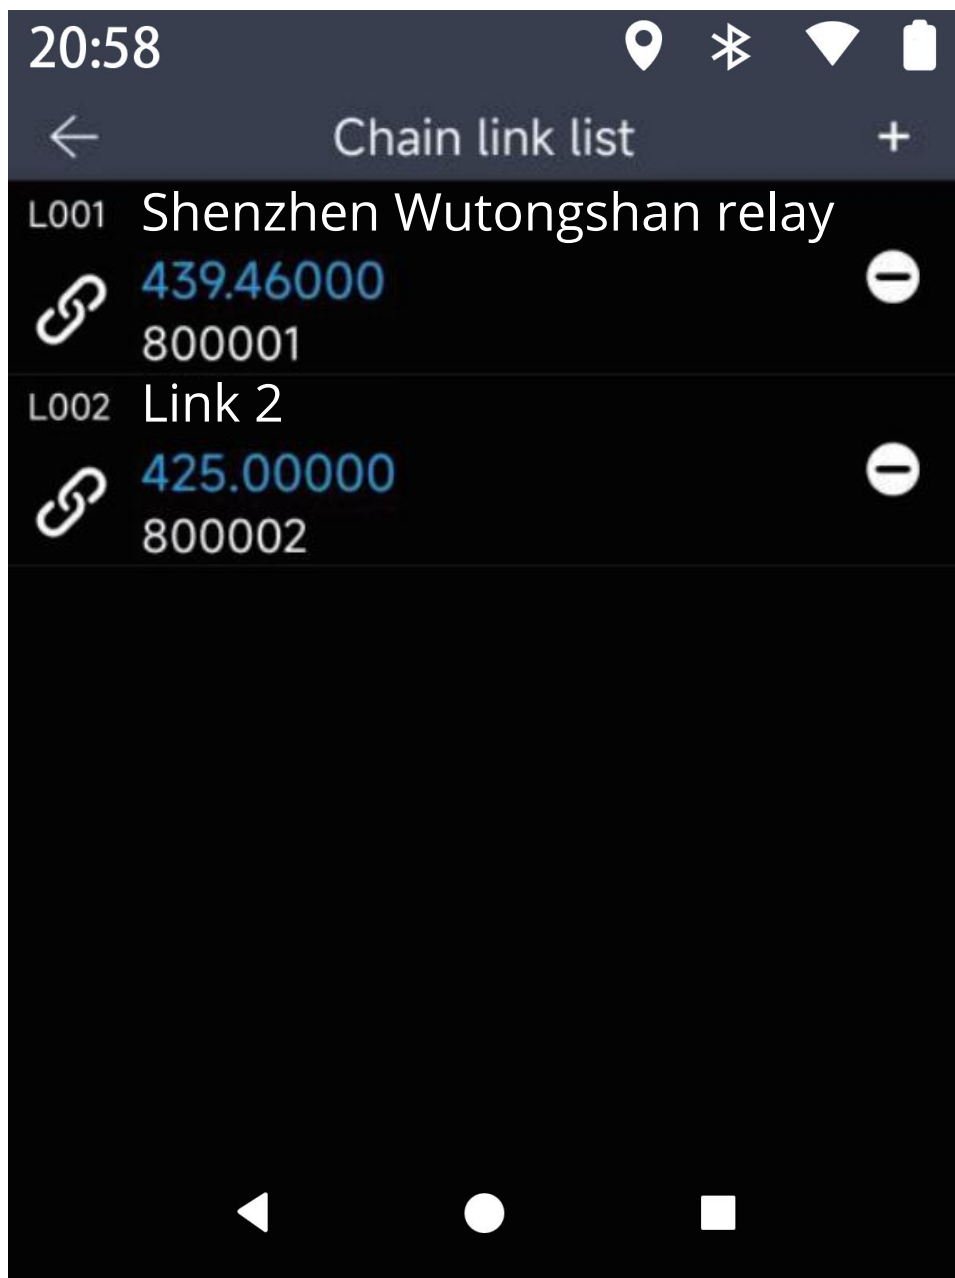

5.Set up

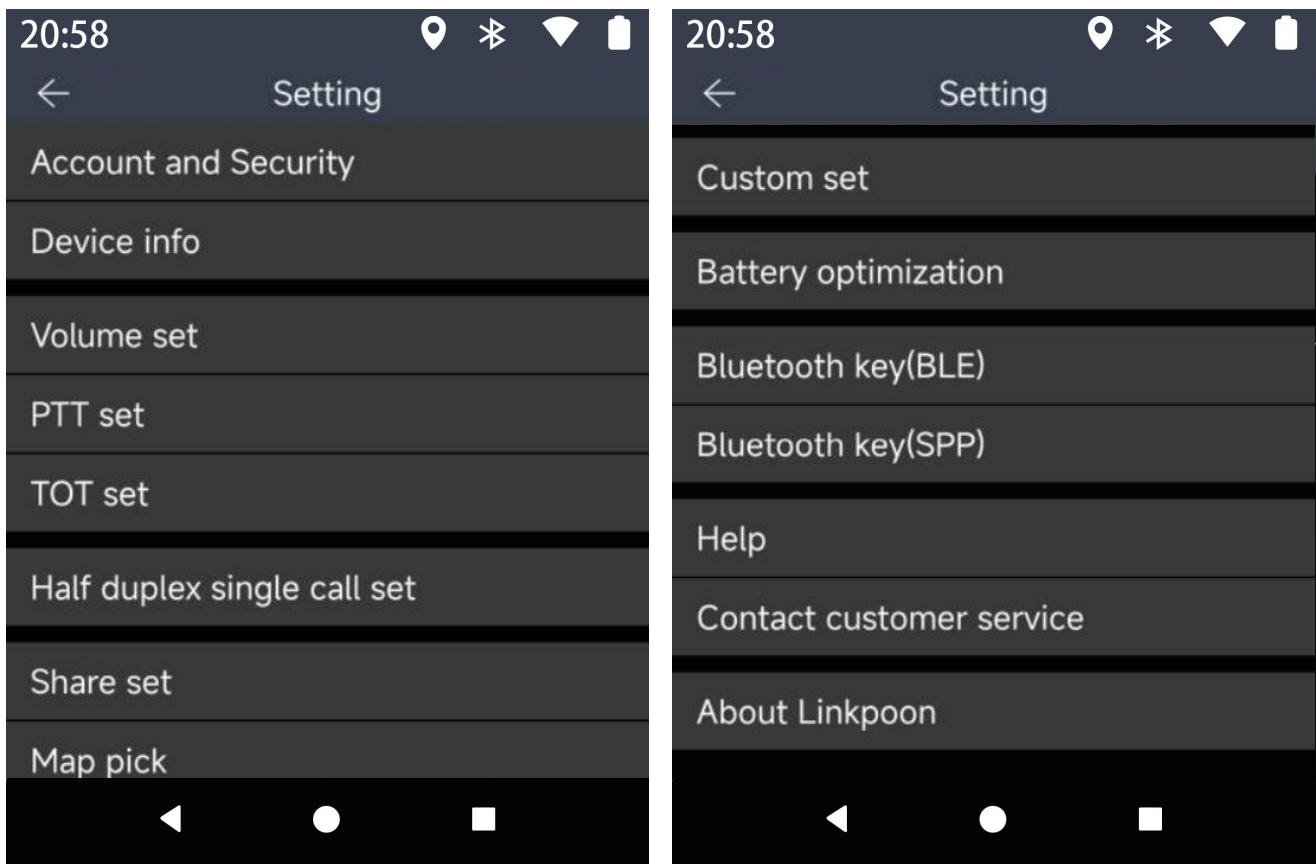

Account and security: View the current login account information, modify my profile.

Device info: View device information.

Volume setting: Select the start tone and end tone; Modify the volume gain parameters. Voice broadcast control and parameter modification; Local digital audio broadcast control.

PTT Settings: You can control the display or hiding of the floating PTT button; Custom PTT button To remove the custom PTT button. The hover button needs to be displayed on the upper layer of other applications, and there is a special permission control switch on the phone, which needs to be displayed on the upper layer of other applications, including system Settings, privacy protection, and special permission Settings.

TOT settings: Select the duration of a single launch speech. When a single launch speech reaches the selected time, the launch will be automatically stopped.

Half-duplex single-call setting: The switch controls whether to enable this function. When this function is enabled, a half-duplex call can be made to a user on the TPRS interface.

Sharing Settings: Report your geographic location so that other users know your general geographic location;

Map selection: there are two kinds of maps from Google and Baidu to choose from, decide which kind of map TPRS uses;

Custom Settings: Start after startup. Open means that the app is allowed to start and run automatically when the Android phone is powered on. Closed does not start.

Light up the screen when speaking: When opening, press PTT to initiate speaking, if the current screen is off, it will light up the screen; Closed, not lit.

Display speech information floating window: Open, pop up a floating window, display the current group name and speaker name information; If closed, it is not displayed.

Battery optimization: Whether to ignore the battery optimization of the system for this application, ignoring it means that the battery consumption of this application is not limited, and to a certain extent, to provide real-time online capabilities of this application; If this parameter is not ignored, the system may restrict the application's permission, and the application may fail to receive calls from others.

Bluetooth button (BLE) : activates the Bluetooth remote control function and connects the Bluetooth (BLE) remote control device.

Bluetooth button (SPP) : connects to classic Bluetooth, mainly through the system Bluetooth operation, this page can only see the connection status.

Help: See answers to some frequently asked questions.

Contact customer service: Contact customer service through wechat.

About Linkpoon: Check Linkpoon website, review the privacy policy, and check if there is a new version.


Disclaimer

Shenzhen Talkpod Technology Co., Ltd. (the Company) strives to ensure the accuracy and completeness of this manual, but does not provide any warranties regarding its accuracy or reliability. Due to ongoing technological advancements, all specifications and designs are subject to change without prior notice. No part of this manual may be reproduced, modified, translated, or distributed in any form or by any means without our explicit written permission. We do not guarantee the accuracy, effectiveness, timeliness, legality, or completeness of any third-party products and content mentioned in this manual for any specific purpose.

Copyright © Shenzhen Talkpod Technology Co., Ltd. 2024. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Shenzhen Talkpod Technology Co., Ltd.

TRADEMARK NOTICE

 Talkpod are trademarks or registered trademarks of Shenzhen Talkpod Technology Co., Ltd. Other trademarks, product, service and company names mentioned are the property of their respective owners.

NO WARRANTY

This document may contain forecast information, including but not limited to information about product families, new technologies, etc.

There are many uncertain factors in practice, which may lead to the difference between the actual information and the forecast information big difference.

Therefore, the information in this document is for reference only and does not constitute any offer or acceptance. Talkpod The above information may be modified without notice.



TALKPOD TECHNOLOGY CO., LTD.

4#419 Saige Tech. Park, Zhenxing Road, Futian District,
Shenzhen, People's Republic of China 518000

Service hotline:4006-918-098

www.talkpod.com